PL6721

HANDS-FREE PEOPLE DOOR ENTRY MONITOR 4.3. SB2

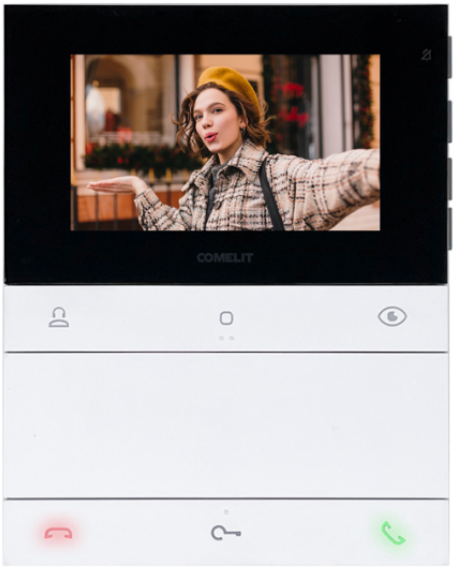

People series colour door entry monitor for Simplebus 2 system. Hands-free version with 4.3-inch / 16:9 screen. Even when switched off, the video door entry monitor can be programmed using a smartphone and the MyComelit app, which can be downloaded free of charge. It is supplied with a metal surface-mounted backplate, which ensures it is firmly and securely anchored, and with a line distribution terminal. It has 6 mechanical buttons on the front panel with icons identifying the factory-set function. 3 of the buttons are backlit to ensure ease of use: green for the ‘audio’ function, red for the ‘end communication’ function, and white for the ‘electric lock’ function. 3 buttons are programmable and pre-configured to call the porter switchboard, control an actuator, and perform self activation. The buttons at the centre of each row are tactile to guide visually impaired people. On the right side of the door entry monitor, on the other hand, there are buttons to activate the Silent mode with a red indicator light and related icon, as well as buttons to access the menu for adjusting brightness, contrast, colour and the ringtone volume. It comes as standard with the floor door call, which can also be programmed for other functions. Dimensions (L x H x D): 135 x 170 x 23 mm

PL6721

HANDS-FREE PEOPLE DOOR ENTRY MONITOR 4.3. SB2

GENERAL DATA	
Height (inch) (in)	6.69
Width (inch) (in)	5.31
Depth (inch) (in)	0.91
Product weight (oz) (oz)	15.17
Product color	White RAL9003, Black RAL9005
Type of finishing materials	ABS, PMMA
Wall-mounted	Yes
Desk base-mounted	Yes, with a dedicated accessory

COMPATIBLE SYSTEMS	
Audio/video Simplebus 2 with power supply art. 4888CU	Yes
Audio/video Simplebus 2 with power supply art. 1210/1210A	Yes
Simplebus 2 audio/video kit with power supply art. 1209	Yes

DISPLAY	
Display size (")	4.3
Type of display	TFT
Aspect Ratio	16:9
Resolution (pixels)	480x272
OSD menu	Yes

AUDIO FEATURES	
Microphone	6mm (Ø), Omnidirectional
Loudspeaker	36mm (Ø), 40 Ohm, 1W

ELECTRICAL CHARACTERISTICS	
Type of power supply	Power supply from video door entry bus
Supply voltage	33VDC

The technical specifications are subject to change without prior notice.

PL6721

HANDS-FREE PEOPLE DOOR ENTRY MONITOR 4.3. SB2

ELECTRICAL CHARACTERISTICS	
Absorption in stand-by (W)	0.03
Maximum absorption (W)	9.2

HARDWARE FEATURES	
Type of buttons	Mechanical
Total buttons (n°)	6
Backlight color	Green, White, Red
Clamps	L L CFP CFP
Removable terminals	Yes
Number of inputs (n°)	1

SETTINGS	
Loudspeaker volume	Yes
Ringtone volume	Yes
Screen brightness control	Yes
Screen contrast	Yes
Screen colour	Yes

NETWORK AND COMMUNICATION PROTOCOLS	
Programming user functions via OSD menu	Yes
Programming installer functions via OSD menu	Yes
Function programming via NFC and MyComelit app	Yes

ENVIRONMENTAL AND COMPLIANCE FEATURES	
IP protection rating	IP30
Operating temperature (°F)	41 ÷ 104
Operating humidity (RH max) (%)	25 ÷ 75
Environmental class	I (B1)

The technical specifications are subject to change without prior notice.

PL6721

HANDS-FREE PEOPLE DOOR ENTRY MONITOR 4.3. SB2

ENVIRONMENTAL AND COMPLIANCE FEATURES	
CE certifications	RoHS II - 2011/65/UE (EN IEC 63000:2018), EMC 2014/30/UE (EN 61000-6-1:2007 , EN 61000-6-3:2007+A1:2011)

GENERAL FEATURES	
Door opener	Yes
Automatic door opening on call (Doctor)	Yes
Silent mode (Privacy)	Yes
Self Activation	Yes
CPS call	Yes
Intercom calls	Yes
Selective intercom call	Yes
Panic call	Yes
Outside door call input	Yes
Customisable ringtone	Yes
Automatic answer (handsfree)	Yes
Actuator control	Yes
Door open signaling	Yes
Acoustic signalling	Yes
Visual signalling	Yes

The technical specifications are subject to change without prior notice.

PL6721

HANDS-FREE PEOPLE DOOR ENTRY MONITOR 4.3. SB2

ACCESSORIES

AC6711 MONITOR ADAPTER FRAME

Adapter frame for Logos series door entry monitor, for use where door entry monitors from the previous series are replaced, to fine-tune the mounting process. Dimensions (L x H x D): 230 x 220 x 3 mm

AC6732 DESK BASE FOR MONITOR

Desk base installation accessory for Logos series door entry monitors. Dimensions (L x H x D): 135.65 x 110 x 122.5 mm

AC6720 WALL SUPPORT FOR HANDS-FREE MONITOR

Wall mount for Logos series hands-free door entry monitors, allowing external routing of cables. Dimensions (L x H x D): 135.4 x 158 x 17.1 mm

The technical specifications are subject to change without prior notice.